

Mr. Heater

Portable Radiant Heaters

Perfect for Construction Sites, Agricultural Buildings, Workshops, Repair Shops, Loading Docks, Large Open-Sided Tents, Sporting Events, Sheds and Barns, Recreation Areas, Remodeling Jobs

- **Efficient Radiant Heat:** Heats objects, not the air
- **Instant Heat:** Piezo push button ignition
- **Economical:** No electricity required
- **Quiet Operation:** No Blowers
- **Made To Last:** Durable steel construction
- **Economical:** Efficient and clean burning
- **Safe:** Shuts off w/loss of flame or power.

Forced Air Propane Heaters

Perfect for Construction Sites, Sports events, Patios, Factories, Garden Parties, Utility/Farm Buildings, Barns

- **Instant Heat:** Economical, efficient and clean burning
- **Maximum Heat Circulation:** Heavy duty high output fan
- **Safe:** Heater shuts off with loss of flame or power supply
- **Made To Last:** Rugged, durable steel construction
- **Ready To Use:** Simple hook-up; hose and regulator included.

Convection Heaters

Ideal for Construction Sites, Industrial/Commercial Work spaces, Agricultural Buildings, Emergencies, Workshops, Sports Events, Remodeling.

- **Instant Heat:** Economical, efficient, and clean burning
- **Economical:** No electricity required
- **Easy Start:** Push button pilot light ignition
- **Uniform Heating:** 360 degree directional heat
- **Ready To Use:** Simple hookup: hose and regulator included
- **Safe:** Heater shuts off with loss of flame; Sturdy base prevents tip-overs

Tank-Top Heaters

- Versatile propane heaters with Hi-Med-Low settings for temporary heat
- BTUs range from 10,000-45,000
- Offered in single, double and triple burner models



J1

| Part no. | Description | BTU/hr (up to) |
|------------|---|----------------|
| MH15 | Tank Top Heater - Single burner | 15,000 |
| MH15C | Tank Top Heater / Cooker | 15,000 |
| MH15T | Tank Top Heater - Single burner | 15,000 |
| MH15TS | Tank Top Heater - Single burner w/Spark Igniter | 15,000 |
| MH30T | Tank Top Heater - 2 burner | 30,000 |
| MH30TS | Tank Top Heater - 2 burner w/Spark Igniter | 30,000 |
| MH35LP | Portable Radiant Heater, LP-Gas | 35,000 |
| MH45T | Tank Top Heater - 3 burner | 45,000 |
| MH60QFAV | Forced Air Heater | 60,000 |
| MH80CVX | Convection Heater | 80,000 |
| MH85QFAV | Forced Air Heater | 85,000 |
| MH125QFAV | Forced Air Heater | 125,000 |
| MH125LP | Portable Radiant Heater, LP-Gas | 125,000 |
| MH170QFAVT | Forced Air Heater w/Thermostat | 170,000 |
| MH200CVX | Convection Heater | 200,000 |
| MH400FAVT | Forced Air Heater w/Thermostat | 400,000 |
| F273169 | Tank Foot Tank Stabilizer | - |

Detroit Radiant

P Series Radiant Heaters

Ceramic burner. Aluminum reflector. Adjustable cylinder mounting bracket. UL. listed single tank pressure regulator and high pressure hose. Excess flow check POL fitting. AGA. Listed manual shut-off. AGA. and UL listed 100% shut-off safety gas valve. Main burner flame sensor. All models features tip over check. Cylinder not included.

P-16T, rated at 16,000 BTU, operates thirty hours on a 20 lb. propane cylinder.

P-32T is rated at 32,000 BTU and operates fifteen hours on a 20 lb. propane cylinder.



| Part no. | Description |
|----------|--|
| P-16T | Portable infrared heater, 16,000 BTU/hr. |
| P-32T | Portable infrared heater, 32,000 BTU/hr. |
| P-101 | P-16T rayhead assembly |
| P-103 | P-32T rayhead assembly |
| P-106 | P-32T reflector assembly |

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

J1

Rev 3/17

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA
(800) 225-6621

Auburn, WA
(800) 426-9456

Rapid City, SD
(800) 843-8660

L.B. White



Tradesman Portable Forced Air Heaters

High temperature output for small to large construction sites. Variable heat output. Electronic ignition, continuous self-diagnostics (on ULTRA models), heavy duty construction, 1 year warranty. CSA models certified for USA and/or Canada.

| Part no. | BTU/hr. | Heated Air Output (CFM) | Fuel Type | Electrical Supply |
|------------|-----------------|-------------------------|-------------|-------------------|
| T100 | 50,000-100,000 | 350 | LP-Gas | 115VAC |
| T170 | 125,000-170,000 | 625 | | |
| T170ULTRA | | | | |
| T170N | 125,000-155,000 | | Natural Gas | |
| T170NULTRA | | | | |
| T400 | 250,000-400,000 | 1530 | LP-Gas | |
| T400ULTRA | | | LP-Gas | |



Workman and Norseman Convection Heaters

Designed and built to handle heating needs in sites that lack electricity. Lightweight and portable. Available in both horizontal and vertical models. Cast iron burner and heavy duty steel construction. Models include the lightweight Workman models and heavy duty Norseman models.

| Part no. | BTU/hr. | Ignition | Fuel Type | Alignment |
|------------|---------|----------|-------------|------------|
| N200H | 200,000 | Manual | LP-Gas | Horizontal |
| N200HPLUS* | | Piezo | | |
| N250 | 250,000 | Manual | | |
| W100PLUS* | 100,000 | Piezo | Natural Gas | Vertical |
| W100NPLUS* | | Piezo | | |
| W225PLUS* | | 225,000 | Piezo | |

* CSA models Certified for U.S. and/or Canada



Premier Ductable Unit Heaters

Great for small work spaces, renovation jobs and applications where low noise is important and heat needs specific direction. Can be used inside or ducted from outside. Automatic thermostat for better temperature control and consistent warmth. Model P350DF operates on dual fuel, either LP-Gas or natural gas. CSA certified for U.S. and/or Canada.

| Part no. | BTU/hr. | Heated Air Output (CFM) | Fuel Type | Electrical Supply |
|----------|-----------------|-------------------------|-------------|-------------------|
| P80* | 40,000-80,000 | 450 | LP-Gas | 115VAC |
| P80N* | | | Natural Gas | |
| P170* | 85,000-170,000 | 1200 | LP-Gas | |
| P170N* | | | Natural Gas | |
| P350* | 175,000-350,000 | 2,400 | LP-Gas | |
| P350N* | | | Natural Gas | |
| P350DF* | | | LP/NAT | |

* Self diagnostic system

J2

TEECO stocks L.B. White replacement parts and accessories. Please call with heater model and parts requirements.

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

J2

Rev 3/17

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA
(800) 225-6621

Auburn, WA
(800) 426-9456

Rapid City, SD
(800) 843-8660

L.B. White



Classic - Pilot Ignition, Side Draw Design

For indoor applications. Simple and dependable operation. Easy to install - all mounting hardware included. Thermostat control. Heavy duty construction and baked polyester paint finish. All heaters available in CSA U.S. certified configurations. Indoor mount only. 115VAC electrical supply required.

| Part no. | BTU/hr. | Heated Air Output (CFM) | Fuel Type | Features |
|--------------|---------|-------------------------|-----------|-------------------------------------|
| CLASSIC60 | 60,000 | 250 | LP-Gas | Thermostat, regulator, 10' gas hose |
| CLASSIC60-3 | | | | ---- |
| CLASSIC60-4 | | | | Thermostat |
| CLASSIC115 | 115,000 | 600 | LP-Gas | Thermostat, regulator, 10' gas hose |
| CLASSIC115-3 | | | | ---- |
| CLASSIC115-4 | | | | Thermostat |
| CLASSIC170 | 170,000 | 760 | LP-Gas | Thermostat, regulator, 10' gas hose |
| CLASSIC170-3 | | | | ---- |
| CLASSIC170-4 | | | | Thermostat |

Guardian - Pilot Ignition, Bottom Draw Design

| Part no. | BTU/hr. | Heated Air Output (CFM) | Fuel Type | Features |
|--------------|-------------------|-------------------------|-----------|------------------------|
| G250PILOT LP | 160,000 - 250,000 | 1050 | LP-Gas | Includes sediment trap |

Guardian - Spark Ignition, Bottom Draw Design

| Part no. | BTU/hr. | Heated Air Output (CFM) | Fuel Type | Features |
|-----------|-------------------|-------------------------|-----------|------------------------|
| G250SI LP | 160,000 - 250,000 | 1050 | LP-Gas | Includes sediment trap |



Guardian - Hot Surface Ignition, Bottom Draw Design

Flexible and economical variable heat output. Compact, with indoor or outdoor mounting capability. Advanced diagnostic controls. High quality components and construction. All models AGA and CGA certified and shipped with sediment trap.

| Part no. | BTU/hr. | Heated Air Output (CFM) | Fuel Type | Electrical Supply |
|------------|-------------------|-------------------------|-------------|-------------------|
| G60HSI LP | 30,000 - 60,000 | 240 | LP-Gas | 115VAC |
| G60HSI-N | | | Natural Gas | |
| G100HSI LP | 50,000 - 100,000 | 400 | LP-Gas | |
| G100HSI-N | | | Natural Gas | |
| G250HSI LP | 160,000 - 250,000 | 1025 | LP-Gas | 220VAC |
| G250HSI-N | | | Natural Gas | |
| G325HSI LP | 200,000 - 325,000 | 1700 | LP-Gas | |
| G325HSI-N | | | Natural Gas | |

Parts and Accessories

TEECO stocks a complete line of L.B. White replacement parts and accessories. Please call with heater model and parts requirements.

| Part no. | Description | For Model |
|----------|-------------------------------|----------------------------|
| 00815 | Sediment trap | All models |
| 08748 | Eye bolts and chain | All, indoor mounting |
| 09810 | Outdoor mounting kit | G60HSI |
| 09811 | Outdoor mounting kit | G100HSI |
| 20094 | Outdoor mounting kit | G250HSI, G250SI, G250PILOT |
| 24097 | Premium Outdoor mounting kit* | G250HSI, G250SI, G250PILOT |
| 09103 | Outdoor mounting kit | G325HSI |
| 24098 | Premium Outdoor mounting kit* | G325HSI |
| 20257 | Sloped top for outdoor mount | G250HSI, G250SI, G250PILOT |
| 20100 | T-Duct (105° duct) | G250HSI, G250SI, G250PILOT |
| 03399 | Gas cock | All models |

* Includes sloped top, insulated ducting and mounting brackets.

J3

Empire Comfort Systems

Radiant Vent-Free Heaters

Burns clean and odor-free. 100% efficient, and more economical than electric. Top-mounted controls. Available in a variety of floor and wall mount models from 10,000 BTU to 30,000 BTU. Piezo Igniter. Optional blowers and non-thermostat models available.

NOTE: Unvented heaters are not approved for use in some locales. Check with proper authorities before installing.

| Part no. | BTU/hr. | Fuel Type | Blower | Automatic Blower | Temp. Control |
|------------|---------|-------------|--------|------------------|---------------|
| SR-10 LP | 10,000 | LP-Gas | - | - | ---- |
| SR-10T LP | | | | | Thermostat |
| SR-10 NAT | | Natural gas | | | ---- |
| SR-10T NAT | | | | | Thermostat |
| SR-18 LP | 18,000 | LP-Gas | SRB-18 | SRB-18T | ---- |
| SR-18T LP | | | | | Thermostat |
| SR-18 NAT | | Natural gas | | | ---- |
| SR-18T NAT | | | | | Thermostat |
| SR-30 LP | 30,000 | LP-Gas | SRB-30 | SRB-30T | ---- |
| SR-30T LP | | | | | Thermostat |
| SR-30 NAT | | Natural gas | | | ---- |
| SR-30T NAT | | | | | Thermostat |



Direct Vent Wall Furnaces

J4

Installs easily on most any outside wall. Requires a minimum of floor space and provides even, energy-efficient heat. Quiet operation. Millivolt wall thermostat and piezo pilot ignition. Blower kit available.

| Part no. | BTU/hr. | Heated Air Output | Fuel Type |
|------------|---------|-------------------|-------------|
| DV210SGXLP | 10,000 | 60 CFM | LP-Gas |
| DV215SGXLP | 15,000 | | LP-Gas |
| DV25SGLP | 25,000 | 75 CFM | LP-Gas |
| DV25SGNAT | | | Natural gas |
| DV35SGLP | 35,000 | | LP-Gas |



UltraSaver90 Vented Space Heaters

Available in 35,000 Btu or 17,500 Btu. Clean, modern cabinet. Cool-Touch cabinet prevents accidental burns. Vents with low-cost, 2" PVC or PolyPro venting. Simple control system. Easy to learn and use. Works with most programmable thermostats. Works at high altitude. Quiet operation. Made in U.S.A.

| Part no. | Description | BTU/hr (up to) | Efficiency Rating | Weight |
|----------|---|----------------|-------------------|---------|
| PVS-18P | Ultra Saver 90-Plus Wall Furnace w/Blower - LP Gas | 17,500 | 90.2% | 112 lbs |
| PVS-18N | Ultra Saver 90-Plus Wall Furnace w/Blower - Natural Gas | 17,500 | 90.2% | 112 lbs |
| PVS-35P | Ultra Saver 90-Plus Wall Furnace w/Blower - LP Gas | 35,000 | 91.8% | 128 lbs |
| PVS-35N | Ultra Saver 90-Plus Wall Furnace w/Blower - Natural Gas | 35,000 | 91.8% | 128 lbs |
| PVSAI | Air Pipe Kit (for Direct-Vent Installation) | - | - | - |



Parts and Accessories

TEECO also stocks Empire replacement parts and accessories. Please call with heater model and parts requirements.

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

J4

Rev 3/17

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA
(800) 225-6621

Auburn, WA
(800) 426-9456

Rapid City, SD
(800) 843-8660

Empire Comfort Systems

Console Vented Room Heaters

Allows a maximum flow of warm air off the unit. Features piezo pilot ignition and hydraulic thermostat temperature control. Heated air output 75 CFM. Optional floor-level blower available.



| Part no. | BTU/hr. | Fuel Type |
|----------|---------|-----------|
| RH-25 LP | 25,000 | LP-Gas |
| RH-35 LP | 35,000 | |

Visual Flame Vented Room Heaters

Allow a maximum flow of warm air. Optional radiants offer an orange, fire-like glow. Features piezo pilot ignition and hydraulic thermostat temperature control. Heated air output 100 CFM.



| Part no. | BTU/hr. | Fuel Type |
|------------|---------|-------------|
| RH-50B LP | 50,000 | LP-Gas |
| RH-50B NAT | | Natural gas |
| RH-65B LP | 65,000 | LP-Gas |
| RH-65B NAT | | Natural gas |

Parts

| Part no. | Description |
|----------|-----------------|
| FRB-3 | Blower |
| RAD-8 | Radiant Package |
| RHL-1 | Ceramic Log |

Vent-Free Blue Flame Heaters

Blue Flame heaters warm the air, which rises to create natural circulation in the room. Ideal for any supplemental heat application, producing an inviting atmospheric warmth quickly and efficiently.

The BF10 is equipped with a hydraulic thermostat with a constant 10,000 Btu input, while the BF20 is equipped with a modulating hydraulic thermostat that modulates from 8,500 Btu to 20,000 Btu for continuous temperature control. The BF30 offers the visual warmth of an alluring blue flame with a hydraulic thermostat that modulates from 8,500 Btu to 30,000 Btu for continuous temperature control.

| Part no. | BTU/hr. | Fuel Type |
|----------|---------|-----------|
| BF-10 LP | 10,000 | LP-Gas |
| BF-20 LP | 20,000 | LP-Gas |
| BF-30 LP | 30,000 | LP-Gas |



Counterflow Furnaces

Direct Vent Counterflow (DV Series) and Upflow Counterflow (FAW Series) wall furnaces require only one square foot of floor space and install on inside or outside walls. Generous 55,000 BTU rating allows multi-room heating with optional side outlet kit. Complete with 24V wall thermostat, piezo pilot ignition and floor level blower. Heated air output 400 CFM.

| Part no. | BTU/hr. | Fuel Type |
|--------------|---------|-------------|
| FAW55SPPXLP | 55,000 | LP-Gas |
| FAW55SPPXNAT | | Natural Gas |
| DVC55SPPXLP | 55,000 | LP-Gas |
| DVC55SPPXNAT | | Natural Gas |
| DVC55IPXLP | | LP-Gas |

Gravity Vented Wall Furnaces

Designed to recess into the wall for super-slim appearance. Piezo pilot ignition, thermostat temperature control. Optional wall thermostat, rear register kit to heat adjoining rooms, and top-mounted blower that increases circulation, but not height. Heated air output 75 CFM. Also available in white.

| Part no. | BTU/hr. | Fuel Type |
|-----------|---------|-------------|
| GWT25WLP | 25,000 | LP-Gas |
| GWT25WNAT | | Natural Gas |
| GWT35WLP | 35,000 | LP-Gas |
| GWT35WNAT | | Natural Gas |
| GWT50WLP | 50,000 | LP-Gas |
| GWT50WNAT | | Natural Gas |



J5

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Detroit Radiant

DR Series

Gas fired, high intensity, unvented/ infra-red heaters. The DR Series is commonly used in areas with high air infiltration, high ceilings, and/or spot heating applications. Very economical.

The DR Series is available in a multitude of configurations, ranging from 30 to 160 MBTU/hr. with nine different control options. Call for application and ordering information.

| Model no. | BTU/hr | | Suggested Mounting Heights | Millivolt | 120V | 24V |
|-----------|-------------|---------|----------------------------|----------------|----------------|----------------|
| | Natural Gas | LP Gas | | | | |
| DR30 | 30,000 | 30,000 | 12' - 14' | NMV-2 PMV-2 | NFS-2 PFS-2 | NFS-2 PFS-2 |
| DR30(S) | | | | | | |
| DR45 | 45,000 | 45,000 | | | | |
| DR50 | 50,000 | 50,000 | | | | |
| DR55 | 55,000 | 55,000 | 13' - 15' | | | |
| DR60 | 60,000 | 60,000 | 14' - 16' | | | |
| DR75 | 75,000 | 75,000 | 15' - 17' | | | |
| DR80 | 80,000 | 80,000 | | | | |
| DR85 | 85,000 | 85,000 | 16' - 18' | | | |
| DR90 | 90,000 | 90,000 | | | | |
| DR95 | 95,000 | | | | | |
| DR100 | 100,000 | | | | | |
| DR130 | 130,000 | 120,000 | 21' - 24' | | | |
| DR160 | 160,000 | 145,000 | 24' - 28' | | | |

DR Series Ordering Instructions

Model Number Format: DR (BTU) (Gas Type) (Ignition Type) (Voltage) Example: DR 60 NFS-2 120V


N = Natural Gas, **P** = Propane Gas

NMV-2/PMV-2 = Manual Ignition, constant pilot, 100% shutoff, self energizing. Includes RK-130 thermostat and 35' of wire.

Note: Millivolt models are not for use in high wind applications.

NFS-2/PFS-2 = Direct spark ignition, 100% shutoff. Specify 24V or 120V

Note: Circuit boards are potted on all models.

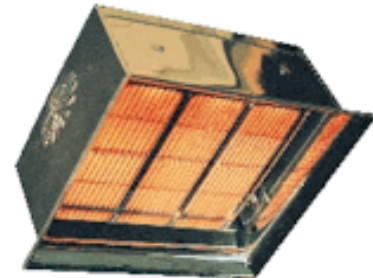

J6

HL3 Series - Two stage, infra-red tube heater

Benefits include superior fuel economy, superior comfort levels and equipment longevity. Capable of operating in either a high fire mode or a low fire mode. Its mode is dictated by momentary environmental demands, resulting in significant fuel savings over single stage infrared heaters. BTU inputs from 65,000 to 200,000 BTU/hr (35% Low Fire Reduction). Tube lengths from 20 to 70 feet. Available in natural or LP-Gas Call for application and ordering information.

DX3L Series - Single stage, infra-red tube heater.

The DX3L Series offers superior low intensity heat, performance and longevity, and is designed to provide years of reliable trouble-free service.

The burner allows this heater to efficiently use BTU inputs from 50,000 to 200,000 BTU/hr. and have emitter lengths from 20 to 80 feet. The true advantage of this burner is the improved heat distribution that it produces. Provisions for various configurations (U or L shaped patterns) are also available. This heater, available in natural or LP-Gas, also offers superior serviceability. Call for application and ordering information



| Series | 20 ft | 30 ft | 40 ft (A) | 40 ft (T) | 50 ft (A) | 50 ft (T) | 60 ft | 70 ft | 80 ft |
|--------|-------|-------|-----------|-----------|-----------|-----------|-------|-------|-------|
| HL2 | • | • | • | • | • | • | • | • | N/A |
| DX3L | • | • | • | • | • | • | • | • | • |