


Portable Hot Plates

Rugged, durable cast iron construction. Heavy-duty burner. Ideal for camping, hunting, fishing, boating, trailers, cabins, snack bars, restaurants, picnics. Available in single, double and triple burner models. Fry clean griddle made of 3/16" fine grade steel available for two or three burner sizes.




SB

Part no.	Description
SB	Single burner, 15,000 BTU
100DV	Replacement valve
100-3	Legs for burner



DB

Part no.	Description
DB	Double burner, 30,000 BTU
200DV	Replacement valve
100-3	Legs for burner

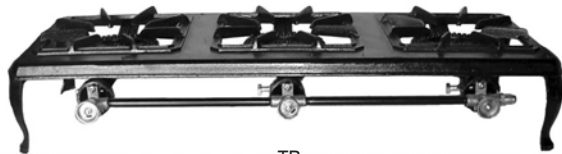

TB

Part no.	Description
TB	Triple burner, 45,000 BTU
300DV	Replacement valve
100-3	Legs for burner

Red Dragon Patio Lights

Produce a soft glow from an open flame. Simply attach to standard 20 lb. Propane cylinder (not included). No oily mess or mantles to break. Each light comes complete with head, post, cart and LPG hookup.

Part no.	Description
Portable Patio Lights	
PT300-6C	Gas light style
PT301-6C	Curled finger style
PT302-6C	Fin style
PT311-6C	Cone style
PT411-6C	Copper Cone style
Permanent Mount Patio Lights	
PT300-6PM	Gas light style
PT301-6PM	Curled finger style
PT302-6PM	Fin style
PT311-6PM	Cone style
PT411-6PM	Copper Cone style

PT300-6C



PT311-6C

PT301-6C

PT302-6C



M1

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Quick Disconnect Couplings

Gas Mate II quick disconnects are easy to install and easy to use. Perfect for outdoor cooking appliances. Just “plug-in” and “plug-out”. Adaptable to most applications. No threaded fittings, no special wrenches needed. Provides thermal and excess flow protection. Meets ANZI Z21.81/CSA 6.25

Male Plug

1/4-18 MNPT thread. Facilitates easy connection of regulator to tank valve.

Part no.	Description
5LPA11C	Flow limiter plug
5LPA8C	Straight through plug, camper/RV applications



Female Socket

Part no.	Description
5LPBV25F	Socket w/ball valve, for camper/RV applications
5SDC5LP	Dust cap



5LPBV25F



5SDC5LP

Female Socket Adapter

For conversion of existing 510 POL threaded cylinder valve connections. Has built-in breakaway nut.

Part no.	Description
5LP510BK	Bag kit w/adaptor, warning tag, instructions
5SDC5LP	Dust cap



M2 Fill Plug

Adapts filling hose to quick disconnect cylinder valve for filling of propane cylinder.

Part no.	Description
5LPAFPC	Fill Plug



MB Sturgis Ball Valve Quick Disconnect

Used for connecting low pressure, low BTU outdoor cooking appliances via quick connect. Commonly used with BBQ Grills, RVs and Brooder Heaters.

Part no.	Description
5LPBV25F	Ball Valve Quick Connect x 1/4" FNPT
401132	Male Plug x 1/4" MNPT
401137	Male Plug x 1/4" Barb



104052



401132

Camping Appliance Tees

Tee-For-Two

Connect to any refillable LP-Gas bulk cylinder to fuel two separate portable appliances.

Part no.	Description
G-413	POL x 1"-20 male x 1"-20 male
G-413P	POL Tee-for-Two in display pack



Extend-A-Flow Tee

Installs between tank valve and regulator. Allows attachment of additional high pressure camping appliance without disruption of normal service.

Part no.	Description
G-415	POL x female POL x 1"-20 male
535-00	Extend-a-Flow kit w/G-415 tee and 42421-144 hose
G-415P	Extend-a-Flow tee in display pack (shown at right w/out packaging)
538-00	Extend-a-Flow Plus kit w/Type 1 ACME pigtail connection. Includes 12' appliance hose



535-00



G-415P

Extend-A-Stay Tee

Installs between tank valve and regulator. Allows attachment of one high pressure camping and hook-up of auxiliary propane cylinder, without disruption of normal service.

Part no.	Description
536-00	Extend-a-Stay kit, with G-420 tee and 40401-60 standard pigtail
537-00	Deluxe Extend-a-Stay kit, with G-420 tee, 40401-60 standard pigtail and 42421-144' appliance hose
G-420P	Extend-a-Stay tee fitting in display pack (shown at right w/out packaging)
580-00	Quick Disconnect Deluxe Sturgi-Stay Kit Includes 578-00, 100794-72 & 100476-120



537-00



G-420

Camping Accessories

RV Quick Fill Assemblies

Allow easy filling of hard-to-reach LP-Gas tanks on RV's. For filling stations and RV owners.

Part no.	Description
RV-34	Quick fill assembly, 1 1/4" ACME male to POL male
RV-39	Quick fill assembly, 1 1/4" ACME male to Type 1 connection



RV-34

Gas Lighters (Containing Gas)

These lighters contain gas and incur additional charges when shipped, due to DHS regulations. They may be picked up at a Teeco location, without the additional fees.

Olympian GM-3, GM-3X GasMatch

Continuous Piezo electric ignition. Will never blow out. Fully adjustable flame. Refillable with .15 oz. fuel capacity. Fuel viewing window. Uses one AA battery. Safety lock ignition switch. Hanger ring. Extended nozzle models available.



Olympian GM-4 GasMatch

Low-cost model. Piezo electric ignition with safety lock. Adjustable flame length. Refillable, with fuel monitoring window. 11" length.



Part no.	Description
GM-3	GasMatch, 4¾" long pipe, 14¾" total length.
GM-3X	GasMatch, 15" flexible nozzle extender
GM-3XE	GasMatch, 26" flexible nozzle extender
GM-4	GasMatch, 5¼" pipe, 11" length

Olympian GM-9 Gas Match

Low-cost refillable model. Two-for-One packaging. Piezo-electric ignition. Adjustable flame, safety lock & fuel viewing window. 11" length.

Part no.	Description
GM-9	GasMatch, 11" length package of two



Butane Refills

Part no.	Description
ML-3892F	Butane gas lighter fuel, 5.3 oz.



Important: Due to DHS regulations, we are not able to ship Gas Lighters or Butane Refills by common carrier (such as UPS). They must be picked up at a Teeco location or shipped freight.

Lighters (Without Fuel)

These lighters & igniters do not contain gas and do not incur additional charges when shipped.

Important: Due to DHS regulations, we are not able to ship Gas Lighters by common carrier (ie, UPS). These items must be picked up at a Teeco location or be shipped freight.

Olympian GM-12 Spark Igniter

Continuous Piezo ignition spark igniter. Immediately ignites any gas appliance. Requires no butane fuel. Curved nozzle and illumination light. Uses 1 "C" battery. Flexible Nozzle versions available.



Part no.	Description
GM-12	Gas Match, 7" ignition pipe, 13" length
GM-12X	Gas Match, 20" ignition pipe, 26" length

GM55 & GM17 Gas Lighters
Contain no fuel - Able to ship via UPS



Part no.	Description
GM55	Gas Lighter, 5 1/2" flexible nozzle
GM17	Gas Lighter, 17" flexible nozzle



Regulator/Hose Assemblies

Complete with a 120,000 BTU regulator, a 5 or 10 foot LPG hose (1/4" MPT x 3/8" F. Fl.), and a choice of end fittings.

POL

Part no.	Regulator	Length
RHA-52	P3641A	5'
RHA-102		10'
RHA-350	108074	5'



POL Low Pressure

Part no.	Regulator	Length
RHA-52L	P3646A	5' Low pressure red hose
RHA-102L		10' Low pressure red hose

Type 1 (QCC)

Part no.	Regulator	Length
RHA-5Q	H3624E	5'
RHA-10Q		10'
RHA-5Q2	P3641A	5'
RHA-10Q2		10'



Regulator Accessories

Part no.	Description
240-36	Inlet fitting, 254-00 series, 1/4" inverted flare x 1/4" MPT



Low Pressure Single-Stage

Part no.	Description
P3641A	Low Pressure Single Stage Regulator, drip lip vent. For LP-Gas Vapor, 80,000 BTU/hr capacity
P3641AP	P3641A in display pack
P3646A	P3641A w/full flow hard-nosed POL
P3646AP	P3646A in display pack
H3624E	Regulator 90° w/QCC Type I connector & 3/8" male pipe x 3/8" male flare fitting
P3644A	Single Stage Regulator with 90° vent



P3646A



H3624E

Low Pressure Two-Stage

Part no.	Description
P3643A	2 Stage Regulator with 6:00 Vent. For LP-Gas Vapor, 200,000BTU/hr capacity
P3643AB	P3643A with Tee Check
P3643AC	P3643A with Excess Flow



P3643A

Low Pressure 2 Stage, Auto Changeover

The Gas-Flo Automatic Changeover Regulator redirects LP-Gas vapor flow from an empty designated service cylinder to a reserve cylinder, without interruption of service.

Features a green indicator dome which changes to red when the service cylinder needs to be refilled.



Part no.	Inlets (Back Check Included)	Outlet	Capacity (BTU/hr Propane)
GR-9984	1/4" F. Inv. Flare	3/8" FPT	345,000 BTU/hr
GR-900	Z Mounting Bracket		
GR-RVB	RV Style Mounting Bracket		

2 Stage Regulator for RVs

High flow rate and ability to maintain 9" W.C. pressure at extremely high flow rates ensure that all the appliances on the coach can easily function and run a standby generator without losing gas pressure.

The 2 Stage Regulator performs the same pressure reducing function as a single stage low pressure regulator, but in two stages. The 1st stage reduces cylinder pressure to 10 PSI and sends it to the 2nd stage where it is reduced to 11" W.C. Provides a very even, efficient flow of gas.



Part no.	Description
108220	Two-Stage Regulator (unpacked)

High Pressure Single Stage

High Pressure Regulator. 1/4" inlet x 1/4" outlet.

Part no.	Description
108052	High pressure regulator, straight, 5 psi, 38,000 btu/hr
108030	High pressure regulator, straight, 10 psi, 125,000 btu/hr



Adjustable High Pressure

0-30 Adjustable Regulator used to control the gas pressure from a small propane cylinder when using small outdoor pressure cookers or turkey fryers.

Part no.	Description
108074	High pressure, single stage adjustable regulator, 325,000 btu/hr
108074-PKGT	108074 in display pack



Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

M4

Sacramento, CA
(800) 225-6621

Auburn, WA
(800) 426-9456

Rapid City, SD
(800) 843-8660

Rev 3/17

LPG Hose Assemblies

High Pressure



Working pressure 350 psi, 1750 psi burst rating.

Part no.	Hose I.D.	Old Series #	End Fittings	Length
100182-24PKG	1/4"***	42410	3/8" MPT x 3/8" F. flare	2'
100182-30PKG				2 1/2'
100182-36PKG				3'
100182-48PKG				4'
100176-24PKG		42413	3/8" F. flare x 3/8" F. flare	2'
100176-36PKG				3'
100176-48PKG				4'
100176-60PKG				5'
100176-144PKG		42420	9/16"-18 LH x 9/16"-18 LH	12'
100185-60PKG				5'
100185-144PKG				12'
100146-60PKG				42421
100146-144PKG	12'			
100172-24PKG	3/8"***	42610	3/8" MPT x 3/8" F. flare	2'
100172-30PKG				30"
100172-36PKG				3'
100172-40PKG				40"
100172-48PKG		4'		
100330-24PKG		42611	3/8" MPT x 1/2" F. flare	2'
100330-30PKG				2 1/2'
100330-36PKG				3'
100330-48PKG				4'
100083-24PKG		42614	3/8" F. flare x 1/2" FPT	2'
100083-36PKG				3'
100083-40PKG				40"
100180-24PKG	42613			3/8" F. flare x 3/8" F. flare
100180-36PKG		3'		
100180-48PKG		4'		
100180-60PKG		5'		
100180-144PKG		12'		

** Thermoplastic hose assembly.

Low Pressure

Part no.	Hose Size I.D.	End Fittings	Length
300L-4	3/8"	3/8" SAE	4'
300L-6			6'
300L-10			10'
300L-15			15'

Thermoplastic Pigtails



Rated at 350 lbs. working pressure and a burst rating of 1750 psi. Meets all applicable U.L. and CGA requirements.

Part no.	Old Series #	End Fittings	Length
100799-12PKG	40410	Type1 (QCC) x 1/4" inverted flare - UL/CGA	12"
100799-15PKG			15"
100799-20PKG			20"
100799-24PKG			24"
100799-30PKG			30"
100799-36PKG			36"
100799-48PKG			48"
100799-60PKG			60"
100457-15PKG	40411	Type 1 (QCC) x 1/4" MPT - UL/ CGA	15"
100457-20PKG			20"
100199-12PKG	40401	Excess flow POL soft nose x 1/4" Inverted flare	12'
100199-15PKG			15'
100199-18PKG			18'
100199-20PKG			20'
100199-24PKG			24'
100199-30PKG			30'
100199-36PKG			36'
100199-40PKG			40'
100199-48PKG			48'
100199-52PKG			52'
100199-60PKG			60'
100200-15PKG			40403
100200-20PKG	20"		
100200-24PKG	24"		
100200-30PKG	30"		
100200-36PKG	36"		
100200-48PKG	48"		
100200-60PKG	60"		
100200-72PKG	72"		
100113-36PKG	40407	Soft nose hand- wheel POL x 1"-20 male	36"
100113-48PKG			48"
100113-60PKG			60"
100113-72PKG			72"
100113-144PKG			144"
BP-3114	-	Soft nose POL x 1/4" inverted flare	24"
BP-3115			30"
BP-3116			36"

M5

Inverted Flare Plugs

Part no.	Description	Size
G-2134	Plug (Steel)	3/16"
G-2133		1/4"
G-2132		5/16"
G-2131		3/8"



Hose Connection Fittings

Disposable Cylinder Adapters

Part no.	Description
G-488	Female 1"-20 x 1/4" MPT
G-488P	G-488 in display pack



Part no.	Description
G-487	Reserve Cylinder Adapter 1-20 Female Cylinder x Female POL



Part no.	Description
G-417	Male 1"-20 x 1/4" MPT w/ check valve and "O"-ring
G-496	Male 1"-20 swivel x 1/4" hose barb



Brass Hose Fittings

Part no.	Description
G-212	Outlet bushing, 9/16"-18 LH x 1/4" MPT



G-212

POL Fittings

Part no.	Description
G-1643	Standard 7/8" hex POL nut
G-415-2	Female POL x 1/4" MPT
G-1699	POL cap
G-1691	Brass POL plug



G-1643



G-415-2



G-1699



G-1691

Hose End Conversion Fitting

Helps control pigtail inventory.

Part no.	Description
240-36	1/4" F. Flare x 1/4" MPT



Hose End Fittings

"Retro-Q" Adapter

Converts POL service valve to QCC (Type 1) outlet.

Part no.	Description
G-1899P	Male POL x 1 15/16" ACME (QCC)



Hose End Fittings

QCC1 / Type 1 Propane Adapter

Part no.	Description
204129	Adapter QCC Type 1 x 1/4" MPT



Steak Saver / Last Chance Propane Adapter

Easily switch from a 20# cylinder to a 1# cylinder

Part no.	Description
204132	Adapter Male Type 1 X Female #600



QCC (Type 1) End Fitting

Part no.	Description
G-1855-A02	1 15/16" ACME (QCC) x 1/4" MPT Black nut, 70,000 BTU/hr.
G-1855-A03	1 15/16" ACME (QCC) x 1/4" MPT. Green nut, 200,000 BTU/hr.
G-1855-B03	1/4" Hose Barb. Green nut
G-204077	1 15/16" ACME (QCC) x 1/4" MPT. Red nut, 500,000 BTU/hr.



G-1855-A02

7/8" POL End Fittings

Part no.	POL Type	End Fitting
G-1675	Full flow	1/4" MPT
G-1675P*		
G-1690	Excess flow	1/4" MPT
G-1690P*		
G-1641	Excess flow, soft nose	1/4" MPT



G-1675

* In display pack. ** With screen.

Handwheel Soft Nose POL End Fittings

Part no.	POL Type	End Fitting
G-1653	Excess flow	1/4" MPT
G-1653A**		
G-1654	Full flow	1/4" MPT
G-1654A**		
G-1654P*		
G-1655	Excess flow	1/4" hose barb
G-1656	Full flow	
G-1656A**		



G-1654A w/Brass
Handwheel



G-1656
(not excess flow)

* In display pack **w/brass handwheel

POL Parts

Part no.	Description
G-1675-1	Standard nipple, full flow, w/ wrench flats, 1/4" MPT
G-1648-1	Short nipple, full flow, w/ hex flats on nose, 1/4" MPT
G-1653-3	"O"-ring for soft nose POL



G-1653

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

M6

Rev 3/17