

### Rinnai Tankless Water Heaters

#### High-Efficiency (Non-Condensing) Tankless Water Heaters

**RL75 & RL94 Series:** These models come standard with a range of comfort and convenience features including circ-logic technology and isolation valves for ease of maintenance.

#### Super-High-Efficiency (Condensing) Tankless Water Heaters

**RUC80I & RUC98I Series:** One of Rinnai's most efficient interior models. Features condensing technology with two heat exchangers, circ-logic technology and isolation valves for ease of maintenance.

**RUR98I Series:** End the wait for hot water with our most efficient tankless water heater featuring ThermoCirc360 Recirculation Technology.

**Endless supply of hot water** - Never worry about running out of hot water again. **More space in the home** - Replacing a large, clunky tank with a Rinnai Tankless Water Heater, which is roughly the size of a carry on suitcase frees up valuable storage space and allows flexibility to install in non-traditional locations such as laundry rooms, closets, etc. **Save on energy and water costs** - Rinnai Tankless Water Heaters use up to 40% less energy than a traditional tank. Additionally, using one of Rinnai's options for recirculation, can supply hot water faster, resulting in less wasted water. **Longer product life** - Rinnai is known for quality. Rinnai Tankless Water Heaters have a life span of up to twice as long as a traditional tank.



RL75I Series



RL94E Series



RUC80I Series



RUC98I Series



RUR98I Series

Model	Temperature Range (Residential)	Flow Rate (70° / 50° Temp Rise)	Min / Max btu	Uniform Energy Factor	Installation Type	Weight
RL75IP	98° - 140°	4.3 / 6.0 gallons	10,300 / 180,000	0.81	Indoor	45.6 lbs
RL75EP	98° - 140°	4.3 / 6.0 gallons	10,300 / 180,000	0.81	Outdoor	45.6 lbs
RL94IP	98° - 140°	4.7 / 6.6 gallons	10,300 / 199,000	0.81	Indoor	46.3 lbs
RL94EP	98° - 140°	4.7 / 6.6 gallons	10,300 / 199,000	0.81	Outdoor	46.3 lbs
RUC80IP	98° - 140°	4.2 / 5.9 gallons	15,200 / 152,000	0.92	Indoor	61.7 lbs
RUC98IP	98° - 140°	5.5 / 7.7 gallons	15,200 / 199,000	0.92	Indoor	61.7 lbs
RUR98IP	98° - 140°	5.5 / 7.7 gallons	15,200 / 199,000	0.92	Indoor	72.8 lbs

#### Value Series Tankless Water Heaters

High Efficiency, Non-Condensing Technology. Ideal for medium to smaller homes, these compact models offer the perfect combination of comfort and value.



V Series Indoor Model



V Series Outdoor Model

Model	Temperature Range (Residential)	Flow Rate (70° / 50° Temp Rise)	Min / Max btu	Uniform Energy Factor	Installation Type	Weight
V53EP	120° - 140°	2.8 / 4.0 gallons	20,200 / 120,000	0.81	Outdoor	34 lbs
V65IP	98° - 140°	3.6 / 5.0 gallons	10,300 / 150,000	0.81	Indoor	45.6 lbs
V65EP	98° - 140°	3.6 / 5.0 gallons	10,300 / 150,000	0.81	Outdoor	43.6 lbs
V75IP	98° - 140°	4.3 / 6.0 gallons	10,300 / 180,000	0.81	Indoor	45.6 lbs
V75EP	98° - 140°	4.3 / 6.0 gallons	10,300 / 180,000	0.81	Outdoor	43.6 lbs
V94IP	98° - 140°	4.7 / 6.6 gallons	10,300 / 199,000	0.81	Indoor	46.3 lbs
V94EP	98° - 140°	4.7 / 6.6 gallons	10,300 / 199,000	0.81	Outdoor	44.3 lbs

Accessories Available. Models listed are for Propane. Also Available in Natural Gas. (For Natural Gas Units, replace P at the end of the part # with N.) Rinnai Next Generation Sensei™ (RU130, RU160, RU180 and RU199 Series) Tankless Water Heaters also available. Please Call.

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

**K1**

Rev 8/20

Order Online: [www.teecoproducts.com](http://www.teecoproducts.com)  
e-mail: [info@teecoproducts.com](mailto:info@teecoproducts.com)

Sacramento, CA  
(800) 225-6621

Auburn, WA  
(800) 426-9456

Rapid City, SD  
(800) 843-8660

**K1**

### Bosch Tankless Gas Water Heaters

#### The Benefits of Going Tankless

Most North American consumers currently use storage tank water heaters to provide domestic hot water, using energy to keep water hot 24 hours a day, even while away from home or sleeping. However, a tankless water heater heats water only when it's needed, making it significantly more energy efficient than storage tank models.

All models featured below are CSA approved and available in LP-Gas or Natural Gas.



#### Electric Ignition Unit

**Bosch Therm Condensing - C1210 Series** - New model offers a flow rate of up to 12.1 gpm, 98% efficiency, and the most advanced features in tankless technology. It is designed to cascade for increased flow rates and will accommodate recirculating applications as well.



Bosch Condensing Electronic Ignition

#### ProTL Series

Energy Star Rated - up to 98% efficient. Designed to offer maximum efficiency during high demand periods in the average North American home. Ultra Low NOx Certified. Digital display for accurate temperature setting. Intelligent cascading up to 24 units.



Bosch ProTL Series

Part Number	Description	Ignition	Max BTU/hr Input	Capacity @ 35° Rise	Thermal Efficiency
C1210ESLP	Tankless Water Heater, LP-Gas	Electric	225,000	12.1 gpm	98%
C1210ESNG	Tankless Water Heater, Natural Gas				
PROTL199C LP	Tankless Water Heater, LP-Gas		199,000	10.5 gpm	92%
PROTL175C LP	Tankless Water Heater, LP-Gas		175,000	9.2 gpm	91%
PROTL199 LP	Tankless Water Heater, LP-Gas		199,000	9.4 gpm	82%
PROTL175 LP	Tankless Water Heater, LP-Gas		175,000	8.3	82%

Also available in Natural Gas configurations

K2

#### Bosch Tankless Water Heater Accessories

Part no.	Description	Features
7709003962	Intelligent Cascading Kit	C950ES, C1050ES and C1210ES models
AQ4	Power Vent Kit	330PN, 520PN & 520HN models
196016	Concentric Termination Kit	C950ES, C1050ES and C1210ES models



7709003962



AQ4



196016

### Selkirk Metalbestos



**Aluminum/Galvanized Steel Double Wall Venting with Lock Tab**  
 "Lock Tab" feature eliminates the need to use sheet metal screws to secure pipe connections in areas where local codes require it. Double wall construction provides permanent insulation and keeps the inner pipe hot and the outer pipe relatively cool. Outer pipe is strong, durable galvanized steel and inner pipe is aluminum. Each end is die formed to assure uniform size and easy joint connection. Fully tested & UL listed. Limited quantities available. Call for details.

### 3" through 5" Aluminum/Galvanized Steel Double Wall Venting - Round

Part no./ Carton qty.						Description
RV Round 3"	RV Round 4"	RV Round 5"				
103060	6	104060	6	105060	4	Pipe-5'
103048	6	104048	6	105048	4	Pipe-4'
103036	6	104036	6	105036	6	Pipe-3'
103024	6	104024	6	105024	6	Pipe-2'
103018	6	104018	6	105018	6	Pipe-18"
103012	6	104012	6	105012	6	Pipe-12"
103006	6	104006	6	105006	6	Pipe-6"
103082	6	104082	6	105082	6	Pipe-12", adjustable
103230	6	104230	6	105230	6	90° elbow, adjustable
103222	6	104222	6	105222	6	Elbow, adjustable. 3" - 6" are 45°/60°. 7" & 8" are 45°.
103100	6	104100	6	105100	6	Tee
103180	6	104180	6	105180	6	Tee cap
103800	6	104800	6	105800	6	Top, Bird-proof
103802	6	104802	6	105802	6	Top, High wind
103810	6	104810	6	105810	6	Storm collar
103240	6	104240	6	1056240	6	Draft hood connector

Part no. / Carton qty.						Description
RV Round 3"	RV Round 4"	RV Round 5"				
187703	6	187704	6	187705	6	Wall thimble - Adjusts from 4 1/8" to 7" thickness
103460	6	104460	6	105460	6	Pipe collar, galvanized-May be used as fire stop
103825	6	104825	6	105825	6	Adjustable roof flashing - Adjustable to 6/12 pitch
103815	6	104815	6	105815	6	Tall cone, flat roof flashing
103820	6	104820	6	105820	6	Tall cone, adj. roof flashing
103304	6					Increaser 3" x 4"
103305	6					Increaser 3" x 5"
		104305	6			Increaser 4" x 5"
		104306	6			Increaser 4" x 6"
				105306	6	Increaser 5" x 6"
				105307	4	Increaser 5" x 7"
						Increaser 6" x 7"
						Increaser 6" x 8"
						Increaser 7" x 8"
		104363	6			Reducer 4" x 3"
				105364	6	Reducer 5" x 4"
						Reducer 6" x 5"
						Reducer 8" x 7"

**K3**

NOTE: CALL items are special order. Other sizes available as special order. Call for details.

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

**K3**

Rev 8/20

Order Online: [www.teecoproducts.com](http://www.teecoproducts.com)  
 e-mail: [info@teecoproducts.com](mailto:info@teecoproducts.com)

Sacramento, CA  
 (800) 225-6621

Auburn, WA  
 (800) 426-9456

Rapid City, SD  
 (800) 843-8660

## Humphrey Gaslights

Mounts permanently and operates on standard low-pressure LP-Gas. Provides brightness comparable to a 70-watt bulb. Preset air-intake eliminates adjustments. One pound of propane produces approximately eleven hours of light. Models available for cottage/cabin and RV applications. Durable Pyrex glass globes. Wall mount, or ceiling mount one to three lights together with optional ceiling mount kit (OPK-3). Durable finishes. Heat-resistant enamels will not chip or crack. AGA approved.

**Series 9** Has a preformed mantle for home, cabin, cottage or other static applications.

Series 9 Part no.	Description
9-NA	Natural almond finish
9-PG	Pebble gray finish
9-RW	Rustic walnut finish
9-FL	Flat chrome finish
9-GR	Hunter green finish

**Series 9T** Uses flexible tie-on or clip-on mantle for campers and RV's. Reduced breakage from vehicle motion.


Series 9T Part no.	Description
9T-NA	Natural almond finish
9T-PG	Pebble gray finish
9T-RW	Rustic walnut finish
9T-FL	Flat chrome finish
9T-GR	Hunter green finish



### Accessories and Parts

High altitude and natural gas nozzles also available. Call for information.

Part no.	Description	For Series
L12-11A	Burner nose for flexible mantle with rim/screen	9T
L12-2A	Burner nose for preformed mantle with hook rim/screen	9
L13-2	Pre-formed mantle (1 pack)	9
L13-6-5PK	Tie-on mantle (5 pack)	9T
L13-6-100PK	Tie-on mantle (100 pack)	9T
L13-8-5PK	Clip on mantle (5 pack)	9T
L24-15-6PK	Seals- Fit between burner nose and Bunsen (six pack)	9, 9T
L6-20	Half-frosted Pyrex globe	9, 9T
L9-50	Propane gas nozzle	9, 9T
L9-52	Propane gas nozzle for use above 4,500 ft. elevation	9, 9T
OPK-3	Kit for mounting 1-3 lights to ceiling. Lights sold separately	9, 9T

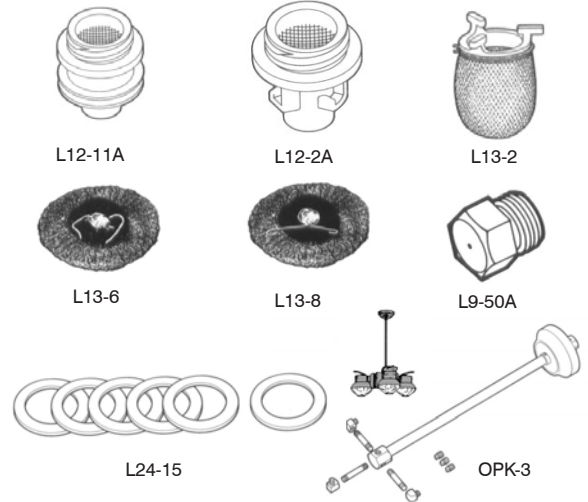


K4

## Chimney Liner Kits

### SWII Flexible Chimney Liner Kits

Quality flexible chimney liner at a competitive price. Kit includes 2-ply flex liner, top, support plate, support sleeve, mortar guard, inlet coupler and hardware.

Part no.	Diameter	Length of liner
1738033	3"	25'
1738055		35'
1748033	4"	25'
1748055		35'
1758033	5"	25'
1758055		35'
1768033	6"	25'
1768055		35'

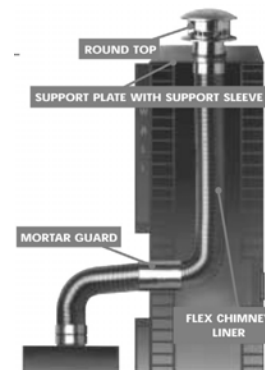

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

K4

Rev 8/20